

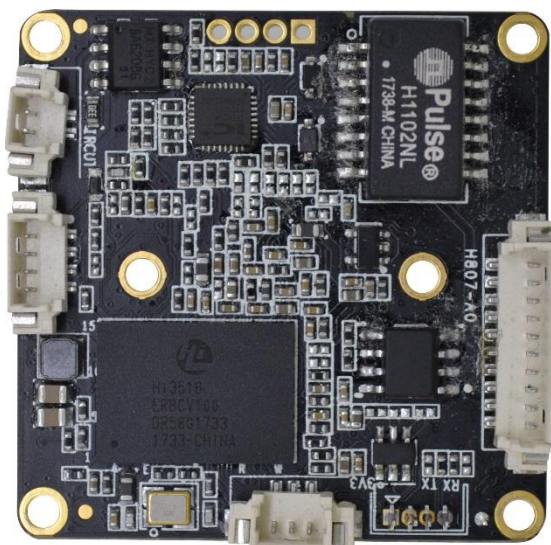


# RS-H626S-A0 200W Specification

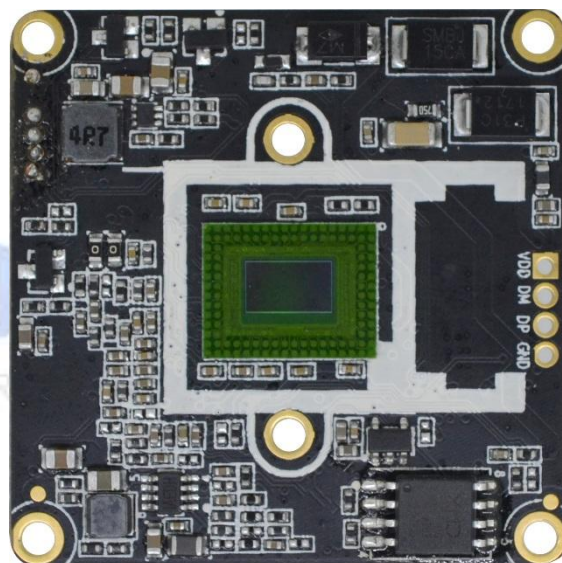

## Products Characteristics

1. 1/2.7" 2MP 307 CMOS image sensor; chipset adopt His3516EV100;
- 2.Support H264, H.265, H.265+;
- 3.Support two stream, main-stream: 1920\*1080 / 1280\*960/1280\*720; sub-stream: 704\*576 /640\*360 / 320\*240;
- 4.Support WDR, 3D-NR、BLC、Auto-white balance for different environment;
- 5.Support ONVIF, can connect with other company's NVR;
- 6.ICR switching to surveille 24 hours;
- 7.Support image shutter, 4 Shutter area can be set;
- 8.Support audio input;
- 9.Support motion detection,motion detection alarm can be sent to email automatically;
- 10.Support OSD setting and network timing;
- 11.Support mobile surveillance(iOS, android)、Web and VMS;
- 12.Support self-maintenance;

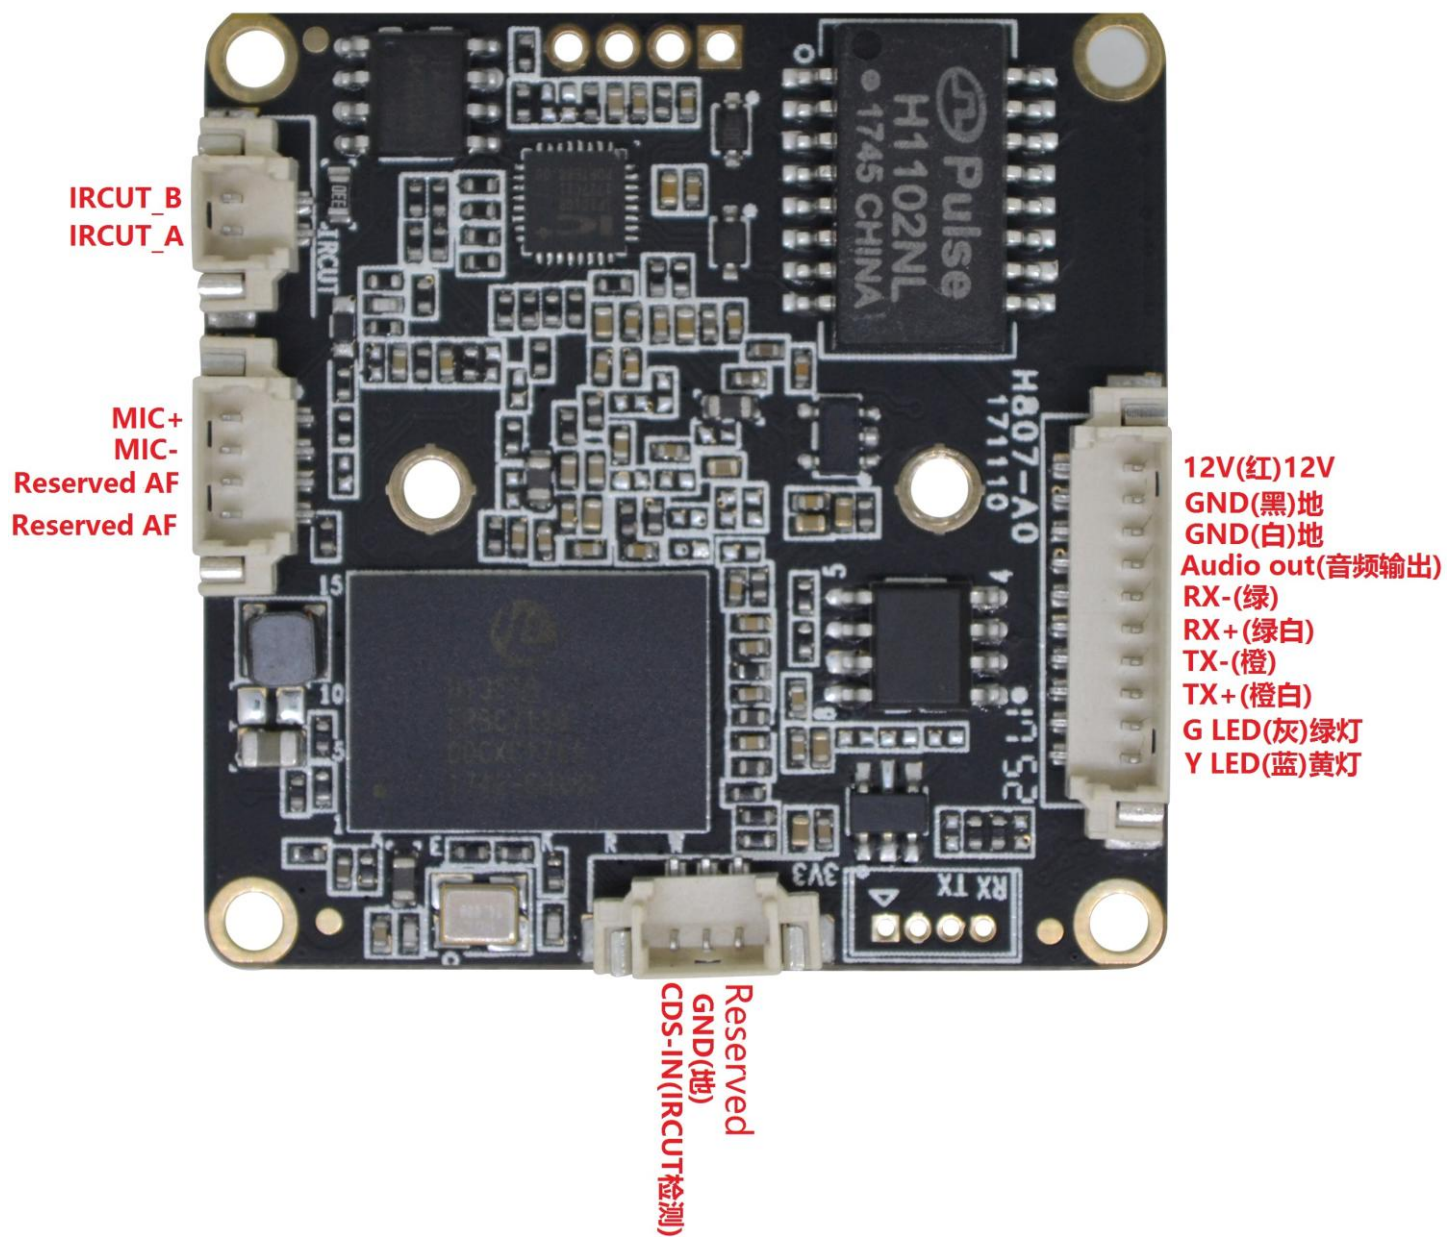

**IR-CUT direction : IR-CUT\_B 为+ (red line) , IR-CUT\_A 为- (black line)**

# parameters

## Camera

|              |              |
|--------------|--------------|
| Main chipset | His3516EV100 |
|--------------|--------------|

|              |               |
|--------------|---------------|
| Image sensor | 1/2.7"2MP 307 |
|--------------|---------------|

## Features

|     |                                        |
|-----|----------------------------------------|
| D/N | Support D/N switching(IR-CUT optional) |
|-----|----------------------------------------|

|         |              |
|---------|--------------|
| Shutter | 1/25-1/10000 |
|---------|--------------|

|               |      |
|---------------|------|
| White balance | Auto |
|---------------|------|

|     |         |
|-----|---------|
| BLC | Support |
|-----|---------|

|                 |       |
|-----------------|-------|
| Noise reduction | 3D-NR |
|-----------------|-------|

|     |       |
|-----|-------|
| WDR | D-WDR |
|-----|-------|

|                  |         |
|------------------|---------|
| Motion detection | Support |
|------------------|---------|

|                 |         |
|-----------------|---------|
| Privacy shelter | 4 areas |
|-----------------|---------|

|        |         |
|--------|---------|
| Mirror | Support |
|--------|---------|

|     |                                               |
|-----|-----------------------------------------------|
| OSD | Support OSD setting, drag the position freely |
|-----|-----------------------------------------------|

|         |         |
|---------|---------|
| Restart | Support |
|---------|---------|

## Video

|             |                       |
|-------------|-----------------------|
| Compression | H.264 , H.265, H.265+ |
|-------------|-----------------------|

|            |                                            |
|------------|--------------------------------------------|
| Resolution | Main-stream: 1920*1080 / 1280*960/1280*720 |
|------------|--------------------------------------------|

|                                         |
|-----------------------------------------|
| Sub-stream: 704*576 / 640*360 / 320*240 |
|-----------------------------------------|

|            |                          |
|------------|--------------------------|
| Frame rate | 20fps(50HZ)、 20fps(60HZ) |
|------------|--------------------------|

|                   |                                                                  |
|-------------------|------------------------------------------------------------------|
| Video adjustments | Brightness、 saturability、 chroma、 contrast、 sharpness adjustment |
|-------------------|------------------------------------------------------------------|

## Network

|          |                |
|----------|----------------|
| Ethernet | RJ-45 10M/100M |
|----------|----------------|

|         |               |
|---------|---------------|
| Wirless | Not available |
|---------|---------------|

|                  |                                                                                                                                             |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Network protocol | HTTP, TCP/IP, IPv4, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, IP Search(Support P6S IP camera, DVR, NVS and etc.) |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------|


|                               |                                        |
|-------------------------------|----------------------------------------|
| Access protocol               | Support ONVIF 2.4/privacy protocol/CGI |
| Max user                      | 6                                      |
| Clicent                       | iPhone, iPad, Android, Windows         |
| <b>Audio</b>                  |                                        |
| Audio                         | G.711U                                 |
| Input                         | 1ch Input                              |
| Output                        | 1ch Output                             |
| <b>General specifications</b> |                                        |
| Size                          | (38x38) x 1                            |
| Temperature                   | -30℃~+60℃                              |
| Power                         | DC12V 2A                               |

#### Attentions:

Forget password: download link: <https://pan.baidu.com/s/1mi9rlqg> Password: 5qjw

Super password maker method:

Download super password maker tool, close antivirus software before use, open software- (input the breaking password of IPC's MAC address) click the encryption button (make super password), log in IPC's IE, the account use super\_admin, the password is the tool made super password, after log in enter the user management to modify admin password.

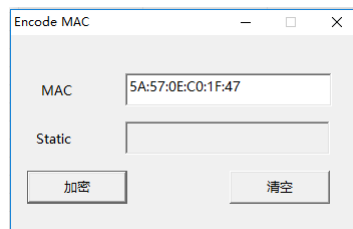

Download link: <https://pan.baidu.com/s/1mi9rlqg> Password: 5qjw

The content in the manual only provides guidance for users, our company will update the content in the instructions depending on the product function enhancing or changing, and we will improve or update the software functions described in the manual. The updated content will be explained in new edition manual, without notice.

**Contact us:**

## **Shenzhen Ruision technology co.ltd**

TEL: (086) 0755-85225969/659/949/156 FAX: (086) 0755-85225809

Website: [www.ruision.cn](http://www.ruision.cn) / [www.ruision.com](http://www.ruision.com) Email: [info@ruision.com](mailto:info@ruision.com)

Address: Building D, Weiyulong industrial park, No.16, huancheng Nor Rd., Bantian, Longgang Dist., Shenzhen , China.

### **Pacific market shop:**

Booth Add: 1A 261-262, Pacific Security Market, Huaqiang North, Futian Dist., Shenzhen.

Booth TEL: (086) 0755-82778606

**Ruision Tech official wechat: szruision**

