

2.0MP Dual-light Dome Coaxial audio Camera HX Series

AHC-HX5320PTA-T-IR2R-AT



Product overview

AHC-HX5320PTA-T-IR2R-AT is an Coaxial audio Camera developed by our company, suitable for places with low or no light conditions and high definition image quality, such as roads, warehouses, underground parking lots, bars, pipelines, parks, etc.

Features



HD Lens




Coaxial control



Coaxial Upgrade



Double light alert



Multiple signal outputs



Zero Delay



Automatic Electronic Shutter



Automatic ICR





Infrared night vision



Coaxial audio

Size Chart

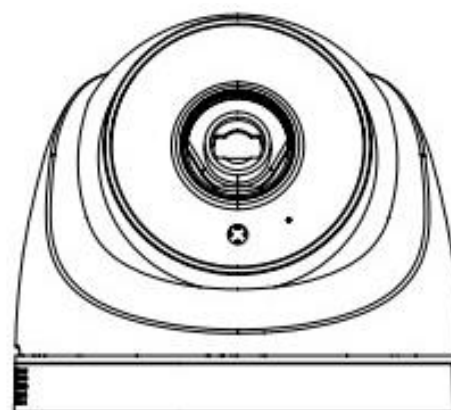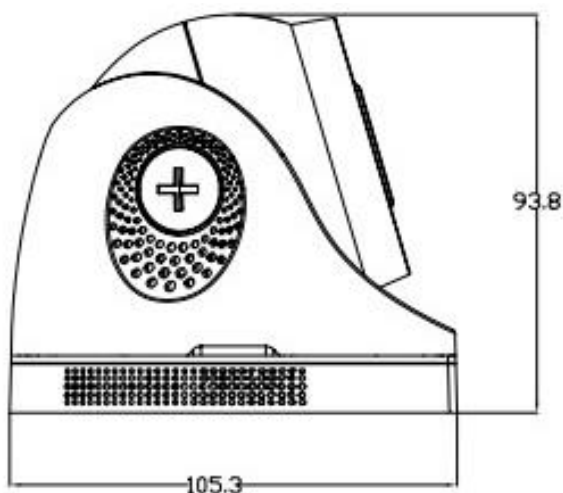

Parameter List

Model	AHC-HX5320PTA-T-IR2R-AT	
Camera	Sensor	2.0 million 1/3" CMOS sensor
	Signal	XVI/AHD/TVI/CVI@1080P
	Min.illumination	Color : 0.01Lux @(F1.2,AGC ON); 0 Lux with IR
		B/W: 0.001 Lux @ (F1.2,AGC ON),0 Lux with IR
	Shutter time	1/50(1/60)s to 1/10,000 s
	Lens	HD lens 3.6mm @F2.2 (2.8mm, 6mm optional)
	Lens mount	M12
	Day&night	IR cut filter with auto switch
	Max.image reolution	1920*1080
Interface	Video output	1Vp-p Composite Output(75Ω/BNC)
	Audio I/O	1/1, Support coaxial audio
General	temperature	0°C- + 55°C
	humidity	10%-90% RH
	Power supply	DC12V±10%
	IR range	3* Array lamp“IR2”:20-30 meters
	Consumption	MAX 4W
	Material	ABS
	Ingress Protection	N/A
	Weight	Around 220g
	Dimension	Φ105*95mm