5MP PoE

Dual-light Dome IP Camera HN Series

HN-5P-GS

Introduction

HN-5P-GS is a waterproof Dome network camera, suitable for places with low or no light conditions and high definition image quality, such as roads, warehouses, underground parking lots, bars, pipelines, parks, etc.

Dimension

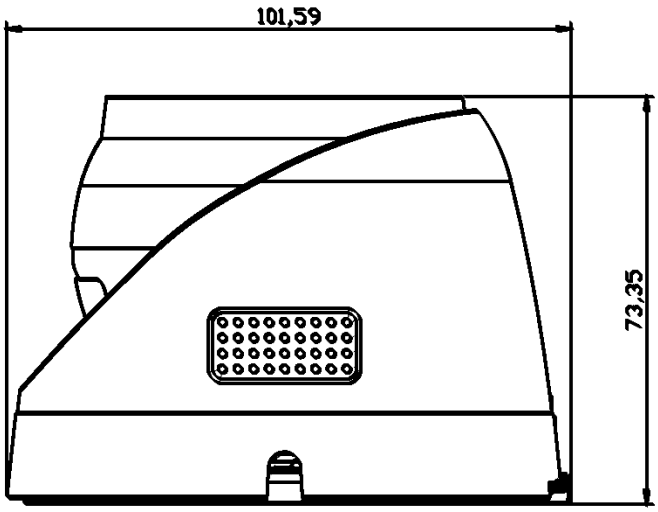

Main Features

- HD Lens
- PoE
- Multi-Platform Support
- IP66 Waterproof
- Human detection
- Onvif
- Automatic electronic shutter
- Automatic ICR
- Face Detection
- Mobile Monitoring
- Voice intercom
- Double light alert

Product parameters

Model HN-5P-GS

Camera

Image Sensor	1/3" CMOS Sensor
Min. Illumination	Color:0.0001Lux;B/W:0.0001 Lux
Shutter Speed	1/50(1/60)s to 1/10,000s
Day&Night	IR cut filter with auto switch
Adjust angle	Horizontal 0~360°,vertical 0~75°

Lens

Focal length	2.8mm/4mm
Viewing angle	4mm D*H*V：92°*78°*38° 2.8mm D*H*V：114°*97°*52°
Lens Mount	M12
Lens aperture	F2.0

Light

Led	2*Dual light bead
range	Infrared 30 meters, white light 20 meters

Video

Max reolution	2592*1944
Frame Rate	2592*1944@30fps,2560*1440@30fps, 2304*1296@30fps,1920*1080@30fps
Video Coding	H.265AI
Bite Rate	0.1Mbps~10Mbps

Audio

Aideo Coding	G.711a
MIC	Sensitivity:- 33±3dBm; Signal to noise ratio:≥ 60dB; Pick up distance: 5 meters
Speaker	Power:1.5W; Rated impedance:8Ω

Network

Network	TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (HTTPS, SIP, 802.1x, IPv6)
Interface	GB/T28181,GA/T1400,onvif
Browser	Chrome，Firefox，Edge

Image

Settings	Image can be adjusted through the client or browser
Enhancement	Backlight compensation, glare suppression, 3D digital noise reduction
WDR	support

Interface

Network	1*10/100Mbps Ethernet port, RJ45 port
Power Supply	Ø5.5 mm
TF card slot	1*TF Card interface (max 256G)
Button	1*Reset Button

Functions

AI functions	humanoid/Face//Vehicle detection

General

Temperature	-10℃- + 60℃
Humidity	10%-95% RH
Power Supply	DC12V±10%/POE48V 0.3A
Consumption	MAX 5W
Material	ABS plastic+Metal
Waterproof	IP66
Weight	Around 260g
Mounting	Wall mounted, top mounted
Dimension	Φ101.59*73.35mm