

4MP 4G AOV

Dual-light Battery Camera



JF-EB-4BG-RS

Introduction

JF-EB-4BG-RS is a 4G AOV battery camera, built-in 5200mAh battery, support Type-C charging, low power consumption and long standby time, support 1 second 1 frame video (AOV state) + full frame rate video (wake-up state), built-in SIM card, 4G network connection, lifetime traffic free. Full color night vision, infrared night vision, dual light alert. Suitable for home, villa, supermarket and other monitoring scenes.



Dimension

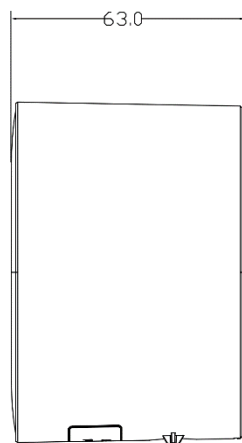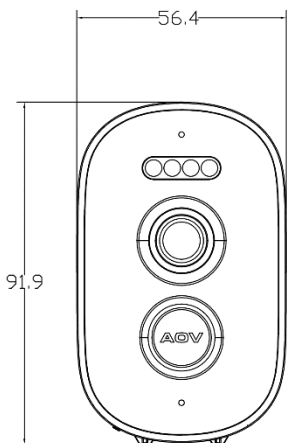

Main Features

- | | | | |
|--|---|---|--|
| 
All-day recording | 
4G | 
double-light alert | 
IP66 |
| 
Human Detection | 
Remote Wakeup | 
H.265AI | 
TF card slot |
| 
internal battery | 
Mobile remote access | 
Voice intercom | 
Cloud Storage |

Product para

meters

Model JF-EB-4BG-RS

Camera

Image Sensor	1/3" CMOS Sensor
Min. Illumination	Color:0.01Lux;B/W:0.001 Lux
Shutter Speed	1/50(1/60)s to 1/10,000s
Day&Night	IR cut filter with auto switch

Lens

Focal length	3.6mm
Viewing angle	D*H*V: 93°*78°*40°
Lens Mount	M12

Light

Led	4*dual light beads
range	Infrared 50 meters, white light 30 meters

Video

Max resolution	2560*1440
Frame Rate	Default 12fps, maximum 25fps
Video Coding	H.265AI
Bite Rate	0.1Mbps~10Mbps

Audio

Aideo Coding	G.711a
MIC	Pick up distance: 5 meters
Speaker	Power:2W; Rated impedance:8Ω

4G

Frequency band	LTE-FDD: B1/B3/B5/B8 LTE-TDD: B34/B38/B39/B40/B41
Rate	upstream up to 2Mbps, downstream up to 6Mbps

Image

Settings	Image can be adjusted through the client or browser
Enhancement	Backlight compensation, glare suppression, 3D digital noise reduction

Interface

Power Supply	USB TYPE-C 5V
TF card slot	1*TF Card interface (max 128G)
SIM card slot	1 self ejecting SIM card holder, standard with telecom 4G card
Button	1*Reset Button, 1*switch

Functions

AI functions	humanoid detection
---------------------	--------------------

General

Temperature	-10°C- +60°C
Humidity	10%-95% RH
Power Supply	DC 5V
Battery	5200mAh
Consumption	MAX 4W
Material	ABS plastic
Waterproof	IP66
Weight	Around 206g
Mounting	wall mounted, top mounted
Dimension	91.9mm*56.4mm*63mm