

# 4MP PoE

## Dual-light Bullet IP Camera EO Series


**JF-IPC-EO8340PG-IR4R-PA**

### Introduction

JF-IPC-EO8340PG-IR4R-PA is a waterproof bullet network camera, suitable for places with low or no light conditions and high definition image quality, such as roads, warehouses, underground parking lots, bars, pipelines, parks, etc.



### Dimension

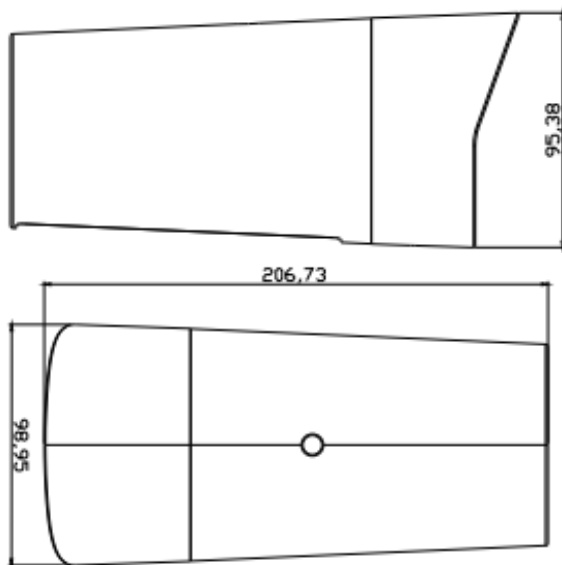

### Main Features

- |                                                                                                        |                                                                                                            |                                                                                                                       |                                                                                                             |
|--------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| <br>HD Lens         | <br>PoE               | <br>Multi-Platform Support       | <br>IP67 Waterproof    |
| <br>Human detection | <br>Onvif             | <br>Automatic electronic shutter | <br>Automatic ICR      |
| <br>Face Detection  | <br>Mobile Monitoring | <br>IR night vision              | <br>Double light alert |



## Product Parameters

**Model** JF-IPC-EO8340PG-IR4R-PA

### Camera

|              |                                                                                           |
|--------------|-------------------------------------------------------------------------------------------|
| Sensor       | 1/2.8" low illumination CMOS sensor                                                       |
| illumination | Color:0.01Lux @(F1.2,AGC ON);0 Lux with IR<br>B/W:0.001 Lux @ (F1.2,AGC ON);0 Lux with IR |
| Shutter      | 1/50(1/60)s to 1/10,000s                                                                  |
| Lens         | HD lens 2.8/3.6/6mm(optional)                                                             |
| Lens Mount   | M12                                                                                       |
| Day&Night    | IR cut filter with auto switch                                                            |

### Network

|          |                                                                                   |
|----------|-----------------------------------------------------------------------------------|
| Storage  | Network storage                                                                   |
| Alarm    | Face detection , human detection, Motion detection, video loss, video block, etc. |
| Protocol | TCP/IP, HTTP, DHCP, DNS, DDNS, PPPoE, SMTP, NTP, (HTTPS, SIP, 802.1x, IPv6 option |
| Features | anti-flicker, dual-stream, heartbeat, password protection                         |

### Image

|                |                                                                                           |
|----------------|-------------------------------------------------------------------------------------------|
| Max resolution | 2560*1440                                                                                 |
| Frame Rate     | 2560*1440@18fps,2304*1296@20fps,<br>1920*1080@25fps                                       |
| Setting        | Saturation, brightness and contrast are adjustable through IE browser or client software. |

### Compression

|                |                                                                 |
|----------------|-----------------------------------------------------------------|
| Video Encoding | H.265A(compatible<br>H.265/H.264) HighProfile,<br>JPEG snapshot |
| Bite Rate      | 0.1Mbps~10Mbps                                                  |
| Audio Encoding | G.711a                                                          |

### General

|             |                            |
|-------------|----------------------------|
| Temperature | -10°C-+60°C                |
| Humidity    | 10%-90% RH                 |
| Power       | DC12V±10%/POE              |
| IR Range    | 8*White Light 40-50 meters |
| Consumption | MAX 5W                     |
| Material    | ABS                        |
| waterproof  | IP67                       |
| Weight      | Around 300g                |
| Dimension   | 206.7mm*98.9mm*95.3mm      |

### Interface

|           |                                       |
|-----------|---------------------------------------|
| Ethernet  | 1*10/100Mbps Ethernet port, RJ45 port |
| Audio I/O | 1/0                                   |