


XAG-53T20PTA-HA

1080P Analog Video Camera Module

Key features:

- 1080P high resolution, the image is more clear and delicate;
- Support coaxial audio, Support audio acquisition and transmission to ADVR;
- Zero-latency data transmission, full real-time, high fidelity;
- Long transmission distance, coaxial transmission up to 500 meters;
- Support UTC, enable OSD by the back-end;
- Support coaxial upgrade, version upgrade convenient and efficient;
- Compatible with AHD/TVI/CVI backend;
- NTSC&PAL 2 in 1, easy to switch through back-end;
- High-definition quality products with competitive price.

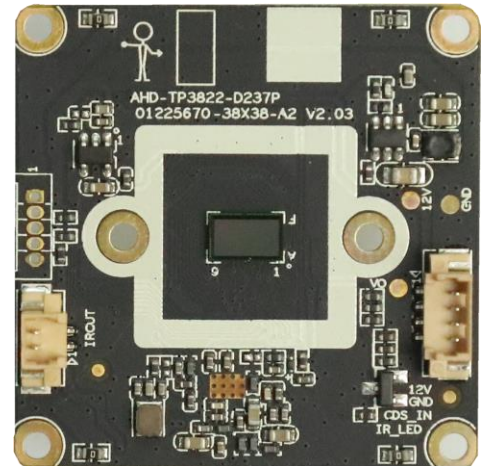


Model:

XAG-53T20PTA-HA

Parameters:

Specifications	XAG-53T20PTA-HA
ISP	TP3822
Sensor	1/3 inch F37P sensor
Signal format	AHD/TVI/CVI
Video Resolution	PAL/NTSC :1920*1080
Minimum Illumination	color: 0.01Lux@ (F1.2, AGC ON) , 0Lux with IR
	Black & White: 0.001Lux@ (F1.2, AGC ON) , 0Lux with IR
Photosensitive Resistance	1 photosensitive resistance interface, support the photosensitive resistor input
Shutter	1/50(1/60) seconds to 1/10,000 seconds
Day and Night Function	Support IR-CUT
Lens Parameters	C/CS interface, M12 lens optional
Video output	1080P@25fps
Power	DC12V±10%
Coaxial Audio	Support 1ch MIC, Support audio acquisition and transmission to ADVR
Temperature and Humidity	- 10 ℃ ~ 60 ℃, humidity is less than 90% (no condensation)
Consumption	<5W
Size	Standard 38*38 positioning hole
Remarks	Support UTC, coaxial upgrade

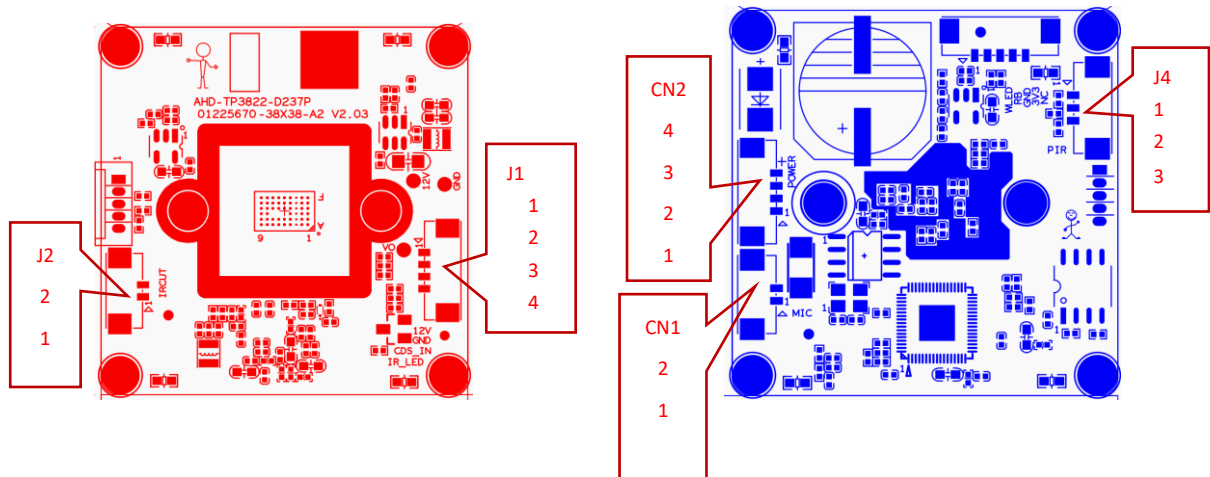

Socket	Specific No	Interface Description	Function
J2	1	IR-CUT	IR-CUT
	2	IR-CUT	IR-CUT
J1	1	12V	12V
	2	GND	GND
	3	CDS_IN	Hard photosensitive input
	4	IR_LED	Infrared lamp control
CN2	1	GND	GND
	2	DAC_OUT	DAC_OUT
	3	GND	GND
	4	12V	12V
CN1	1	MICN	MIC
	2	MICP	
J4	1	PIR_IN	PIR
	2	GND	
	3	3V3	